



**Guangzhou Best Electronic Technology co.,Ltd**

[www.entelechybattery.com](http://www.entelechybattery.com)

Address: 5/F, C District, No. 98, Road 9, Pacific Industrial Zone, Xintang Town, Zengcheng District, Guangzhou, China



# BST-LRG BATTERY SPECIFICATION

**Product type: LRG Battery**

**product model: BST-LRG-25.6V100Ah**



Guangzhou Best Electronic Technology Co., Ltd

Amendment Records

**Note: The company's electronic documents and printed documents with the red "Controlled Document" seal are controlled documents, and other printed documents are non-controlled documents.**

## 1.Scope of application

This specification describes the technical index requirements of 25.6V100Ah lithium iron phosphate battery.

## 2. Model: 25.6V100Ah

2.1 The battery uses a cylindrical cell model of 32700 lithium iron phosphate 3.2V6.0Ah;

2.2 The entire battery pack is composed of 17PCS cells in parallel to form a battery string, and 8 strings of cells are connected in series to form a battery module, a total of 136PCS cells;

## 3. Reference standards and test requirements

3.1 YD/T2344.1-2011 Lithium iron phosphate battery pack for communication.

3.2 UN38.3 "Recommendation on the Transport of Dangerous Goods: Manual of Tests and Standards" Part III, Section 38.3

3.3 GB4208-2008/IEC60529:2001 Cover protection class (IP code)

3.4 Standard test environment

Unless otherwise specified, all tests in this specification are carried out under the following environmental conditions:

Temperature:  $(25\pm 2)^{\circ}\text{C}$

Humidity:  $(65\pm 20)\%\text{RH}$

Standard charging current: 0.33C

Standard discharging current: 100A

## 4. Technical Parameters

### 4.1 System parameters


Project		Specification	Remarks
1	Rated voltage	25.6V	
2	Nominal capacity	100Ah	After standard charging, 50A current discharge capacity: $\geq 50\text{Ah}$
3	Nominal voltage	25.6V	The median voltage of the standard discharge process after standard charging
4	Maximum continuous charging current	100A	1.0C
5	Maximum continuous discharge current	100A	1.0C; peak current: 300A for 5s
6	Cycle life	2000 cycles	$25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ ; 1.0C charge, 1.0C discharge; 80%DOD
7	Upper charging voltage	$(29.2 \pm 0.05)\text{V}$	@ $(20-45)^{\circ}\text{C}$
8	Discharge termination voltage	17.6V	Determining discharge cutoff voltage of capacity, single series cutoff voltage 2.2V
9	Charge time	About 3h	Rated charging current: 0.3C
10	Charge-discharge efficiency	$\geq 96\%$	Volumetric efficiency
11	Cooling way	Natural cooling	
12	Operating Temperature	charging	$(0-60)^{\circ}\text{C}$
		discharge	$(-20-60)^{\circ}\text{C}$
13	Relative humidity	$(65 \pm 20)\%$	
14	Battery pack composition	17 parallel and 8 series	A total of 136PCS battery cells
15	Battery Pack Weight	$\leq 26.5\text{Kg}$	

## 4.2 BMS Parameters

### 4.2.1 BMS function introduction:

- Discharge over current and short circuit protection function.
- Over voltage, less voltage, temperature and over load protection functions;
- Using an integrated solution, the performance of the protection board is more stable;
- Using imported MOS tube, low internal resistance, high current, high precision;
- Balance function.

## 4.2.2 BMS Principle diagram

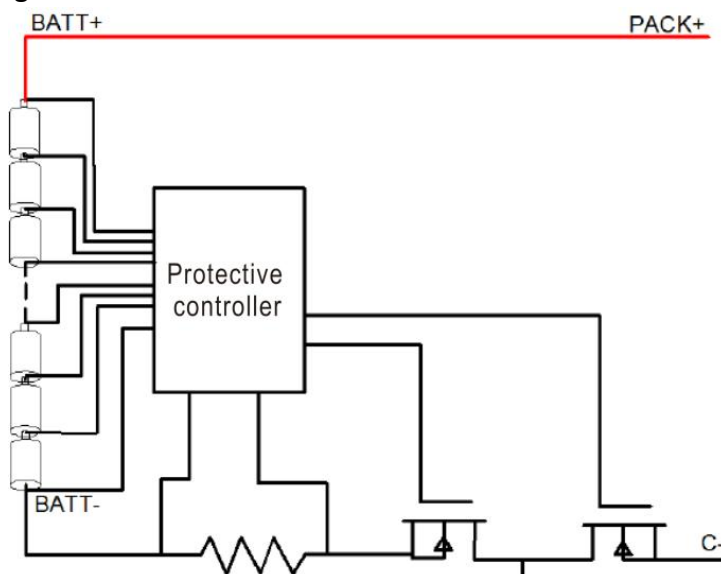

## 4.2.3 BMS Parameters

	Operating range	20V-29.2V
Operating current	Operating range	≤100A
Operating Temperature	Operating range	-20℃ ~ +70℃
Power Self-consumption	Power Self-consumption in working condition	≤50μA
internal resistance		≤20mΩ
Overcharge protection	Protection voltage	3.75±0.05V
	Recovery voltage	3.60±0.05V
	Over voltage protection delay	1s
	Protection current	300±30A
	Over current protection delay	0.1s
Over discharge protection	Protection voltage	2.50±0.1V
	Recovery voltage	2.70±0.1V
	protection delay	0.50 ~ 1.50S
	Protection current	300±30A
short circuit protection	protection delay	200us
	Recovery conditions	Disconnect load
Temperature protection	Over temperature protection temperature	/
	Recovery temperature/time	/
Charge balance	Charge balance start voltage	3.60V
	Balance current	30±5mA



### 4.3 Battery pack structure size

#### 4.3.1 Battery outline drawing (522×240×218mm Includes handle;tolerance class:GB/T1804-M)



25.6V100Ah Battery outside picture

(Picture only for you reference,result depends on production)

## 5. Battery performance

### 5.1 Cycle performance

Project		Standard	Test Conditions
1	Cycle life	After 2000 cycles, the remaining capacity is $\geq 80\%$ of the rated capacity	In a $25^{\circ}\text{C}$ environment, battery charge and discharge with $0.33\text{C}$ , $80\%$ DOD

### 5.2 High and low temperature performance

Project		Standard	Test Conditions
1	$-20^{\circ}\text{C}$ low temperature discharge	Discharge capacity $\geq 70\%$ * rated capacity	After standard charging, let it stand for 20h in an environment of $-20^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , and discharge to the cut-off voltage at a constant current of $1\text{C}$ ;
2	$55^{\circ}\text{C}$ High temperature discharge	Discharge capacity $\geq 95\%$ * rated capacity	After standard charging, let it stand for 5h at $55^{\circ}\text{C} \pm 2^{\circ}\text{C}$ environment, discharge to cut-off voltage at $1\text{C}$ constant current

### 5.3 Storage performance

Project			Initial SOC	Standard	Condition
1	Capacity retention rate	25 °C 1month	100%	90%	The percentage of the discharge capacity after storage to the capacity before storage, test condition: standard charge and discharge
		60°C 7day	100%	90%	
2	Capacity recovery rate	25 °C 1month	100%	95%	After testing the remaining capacity after storage, charge and discharge as standard Power cycle 3 times, the highest capacity is the recovery capacity, the percentage of the recovery capacity and the capacity before storage is the recovery rate
		60°C 7day	100%	95%	

## 6. Storage and transportation

6.1 According to the characteristics of the battery, the lithium iron phosphate battery pack should meet its storage environmental conditions during storage and transportation, so as to protect the battery performance to the utmost.

6.2 Appropriate protection should be provided during storage and transportation of lithium iron phosphate batteries; Maintain a SOC level of about 50%; ensure that no short circuit and liquid enter the lithium iron phosphate battery or soak in liquid (such as water, oil, etc.);

6.3 If not in use temporarily, the battery should be stored in a dry, clean and well-ventilated warehouse at 0°C ~45°C.

6.4 During the process of loading and unloading, the battery should be handled with care, and avoid dropping, rolling, and heavy pressure.

## 7. Safety rules

Misuse of lithium-ion rechargeable batteries may cause battery damage or personal injury. Before using the lithium-ion rechargeable battery, please read the following safety rules carefully

### 7.1 Battery precautions

7.1.1 Do not expose the battery to extreme heat or fire.

7.1.2 Do not short-circuit, overcharge or over-discharge the battery.

7.1.3 Do not subject the battery to excessive mechanical shock.

7.1.4 Do not immerse the battery in sea water or water, or make it damp.

7.1.5 Do not disassemble or repair the battery.

7.1.6 Do not put the battery and metal objects such as necklaces, coins or hairpins together.

**Note: The company's electronic documents and printed documents with the red "Controlled Document" seal are controlled documents, and other printed documents are non-controlled documents.**



7.1.7 Do not cause obvious damage or deformation of the battery.

7.1.8 Do not connect the battery directly to the socket.

7.1.9 Do not mix lithium-ion batteries.

7.1.10 Do not place the battery in direct sunlight.

7.1.11 Keep the battery away from children.

7.1.12 Do not puncture, beat or trample the battery.

## 7.2 Battery instructions

### 7.2.1 Charging

- 1) The battery charging temperature range is (0-60)°C.
- 2) Use a constant current and constant voltage lithium-ion battery charger.
- 3) Correctly connect the positive and negative poles of the battery, and reverse charging is strictly prohibited. If the positive and negative poles of the battery are reversed, there is a risk of arcing and short circuit.

### 7.2.2 Discharge

- 1) The discharge temperature range of the battery is (-20-60)°C.
- 2) During the long period of non-use of the battery, the battery may be in a certain over-discharged state due to its self-discharge characteristics. In order to prevent the occurrence of over-discharge, the battery should be charged regularly to maintain its cell voltage between (3.3-3.5)V. Over-discharge will cause the loss of battery performance and function.